MPC-5V60A

2~8°C Pharmacy Refrigerator





FEATURERS




Suction circulation system Fan for better temp uniformity



Internal LED lighting Easy to observe the interior

Lockable doors 3 Standard locks with keys for 3 doors



 $\overline{+}$

Antibacterial and corrosion resistant Precise temp. control

High-quality steel materials



5 types of alarm Audible and visual alarms

Temp. control accurate to 0.1°C




Ŷ

Variable space Height adjustable shelves

Eco-friendly


CFC-free refrigerant and energy-saving





STRUCTURE



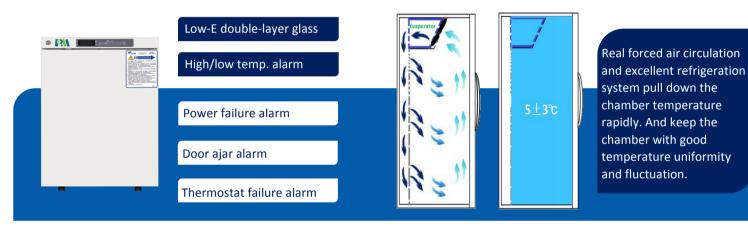

PARAMETER

Performance		Refrige	Refrigeration System		Alarms	
Cooling method	Forced Air Cooling	Refrigerant	R600a	High/low temperature	Y	
Defrost	Auto	Temp. controller	Microprocessor	Power failure	Y	
Shelf/drawer	Shelves/3	Sensor	NTC	Sensor error	Y	
Temperature range	2°C~8°C	Display	Digital display	Controller failure	Y	
Ambient temperature	10~32 ℃	External material	SPCC sprayed steel	Door ajar	Y	
Noise (db)	50	Compressor QTY	1	Power failure backup	8 hours	

Electrical Data		Dimensions		Other	
Voltage frequency(V/Hz)	220V 50Hz/60Hz	Package size(W*D*H)(mm)	580*580*940	Inside door	3 shelves
Power (W)	80	Capacity (L/cu.ft)	100/3.53	Lighting	LED
Current(A)	0.8	Exterior size(W*D*H)(mm)	505*510*875	Access port QTY/Dia.	1/25mm
Power consumption	1.15kWh/24h	Interior size(W*D*H)(mm)	385*356*737	Internal material	HIPS

Anhui Zhongke Duling Commercial Appliance Co.,Ltd No. 1 Hexianghuroad,changfeng,hefei, Anhui, China

